

340A Cable Assembly





DIMENSIONS

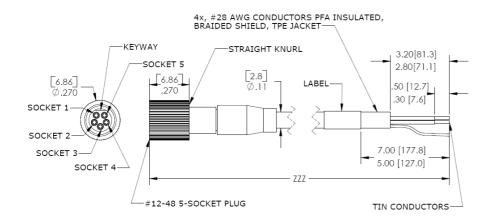



DESCRIPTION

Piezoresistive plug and play accelerometer cable assembly featuring #12-48, 5-socket plug. Standard cable length is 120 inches. Mates with accelerometer models 3801A, 4801A, 4810A, 4605.

FEATURES

TPE Jacket
PFA Insulated #28 AWG Conductors
Braided Shield
Straight Knurl on Socket
-55°C to +125°C Temp Range

APPLICATIONS

Flight Testing Laboratory Testing Vibration Monitoring General Purpose Shock Monitoring

340A Cable Assembly



ORDERING CODE

340A-ZZZ (-ZZZ designates length in inches, -120 standard)

NORTH AMERICA

Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 Sales and Customer Service

Tel: +1-800-745-8008 or +1-757-766-1500 Fax: +1-757-766-4297 t&m@meas-spec.com

EUROPE

Measurement Specialties 26 Rue des Dames

F78340 Les Clayes-sous-Bois France

Sales and Customer Service

Tel: +33 (0) 1 79 33 00 Fax: +33(0)1 34 81 03 59 t&m@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.

No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District Shenzhen, China 518107

Tel: +86 755 3330 5088 Fax: +86 755 3330 5099 t&m@meas-spec.com

Sales and Customer Service

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.